

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
18 October 2001 (18.10.2001)

PCT

(10) International Publication Number  
**WO 01/77842 A1**

(51) International Patent Classification<sup>7</sup>: **G06F 13/00**,  
15/173

**Johanna**; 12 North Southwoods Avenue, Annapolis, MD  
21401 (US).

(21) International Application Number: PCT/US01/11635

(74) Agent: **BOLLMAN, William, H.**; Manelli Denison &  
Selter PLLc, Suite 700, 2000 M Street, NW, Washington, DC  
20036-3307 (US).

(22) International Filing Date: 10 April 2001 (10.04.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
60/196,102 11 April 2000 (11.04.2000) US  
09/785,438 20 February 2001 (20.02.2001) US

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ,  
DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR,  
HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR,  
LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ,  
NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM,  
TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.

(71) Applicant: **TELECOMMUNICATION SYSTEMS,  
INC.** [US/US]; Suite 400, 275 West Street, Annapolis,  
MD 21401 (US).


(84) Designated States (*regional*): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian  
patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European  
patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE,  
IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF,  
CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

(72) Inventors: **SMITH, Richard, A.**; 12 North Southwoods  
Avenue, Annapolis, MD 21401 (US). **LEVINE, Steven,  
H.**; 1801 Utah #B, Baltimore, MD 21217 (US). **WILSON,**

**Published:**  
— with international search report

[Continued on next page]

(54) Title: INDIVIDUALIZED NETWORK INFORMATION SERVER

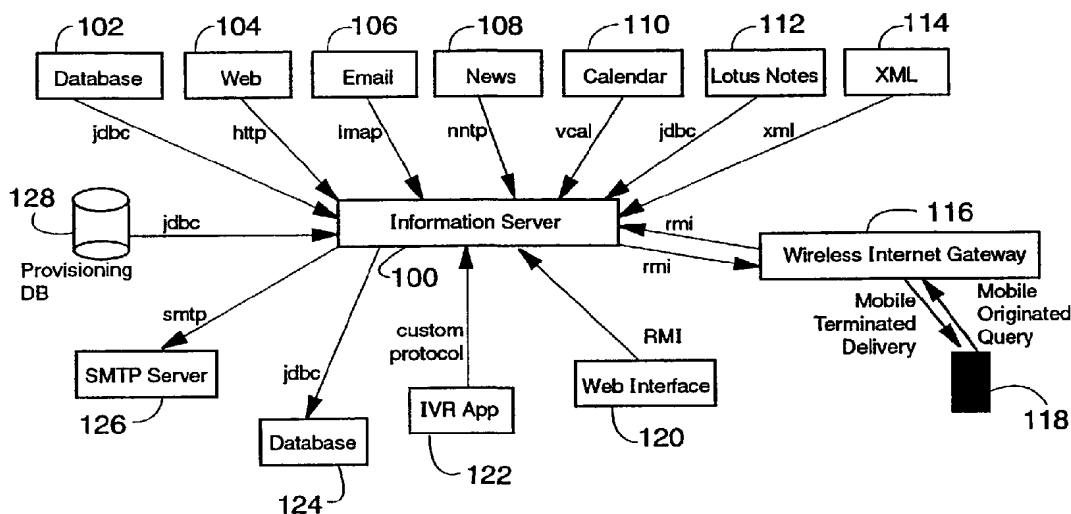

(57) Abstract: A mechanism for retrieving, examining, formatting, and forwarding information content as a service to a user (118) of an individual level. A data worker focused on the needs of an individual user (118) of a network (e.g., a mobile device of a particular data source (102-114) through a data source interface module. Upon an event determined from content obtained from said data source (102-114), periodically, on demand, etc., as determined by the individual user (118), content data is retrieved from a data source (102-114) under the automatic control of the data worker, and forwarded to the user at one or more destination. Data sources can include, e.g., web pages, databases, XML documents, and Email (IMAP) accounts, legacy relational databases, news, notes, vCalendar, etc. Information can be directed to any type destination, e.g., to Email accounts, wireless devices via a short message services, databases, or other special handlers.

WO 01/77842 A1



---

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

# INDIVIDUALIZED NETWORK INFORMATION SERVER

## BACKGROUND OF THE INVENTION

### 1. Field of the Invention

5           This invention relates to individualized information management and delivery. More particularly, it relates to individual information detection and delivery for long distance carriers, Internet Service Providers (ISPs), and information content delivery services, particularly in a wireless environment.

### 10   2. Background

Information in this the information age is paramount. Moreover, in an increasingly mobile world, the popularity of communication devices in particular, and wireless mobile devices especially, has been overwhelming.

15           In this environment, the need for a user to frequently access particular information (e.g., the latest weather or stock quotes from a web site, etc.) becomes more necessary.

20           A user may today access a particular web site to check weather, stock quotes, etc. A more interested user may repeatedly 'refresh' a browser accessing a web page relating to the weather, stock quotes, etc., manually determining if any change has occurred since they last checked the relevant web page. These more frequent accesses lead to increased traffic in the bandwidth between the sever containing the particular web page and the user's access device (e.g., Email account, mobile device, etc.) Unfortunately, increased traffic leads to poorer performance of the overall system, not to mention lost time of the user in repeatedly refreshing or re-retrieving source data (e.g., a web page) which has not changed from the last time it was accessed.

25           There is a need for an information delivery system which improves efficiency of both the user and the networked system.

### 30   SUMMARY OF THE INVENTION

35           In accordance with the principles of the present invention, an individualized network information delivery system comprises a data source interface module, a data worker module, and a data event destination module. The data worker module generates data events and delivers them to the destination module. Once a destination receives a data event, it queries the data

event to determine from where the data should be retrieved. The destination can use separate formatter objects to format the content. The destination module has the option of delivering directly to a device or to other destination modules.

By separating the roles of data source, destination, and action initiators ('workers'), the system becomes very flexible in design. It becomes possible to 'hook up' any combination of source and destination modules, and to easily configure when data transactions should take place. Since destinations can also act as sources, it is possible to route data through a series of 'filters' that can process the data for ultimate delivery to the end-user or application.

### BRIEF DESCRIPTION OF THE DRAWINGS

Features and advantages of the present invention will become apparent to those skilled in the art from the following description with reference to the drawings, in which:

Fig. 1 illustrates the core functionality of an infoserver with an exemplary infoserver retrieving data from any or all of a plurality of different data sources as a service provided to an individual user, e.g., mobile user, in accordance with the principles of the present invention.

Fig. 2 illustrates core functionality of an infoserver, in accordance with the principles of the present invention.

Fig. 3 is a more detailed view of an exemplary software architecture with communications shown between software modules, in accordance with the principles of the present invention.

Fig. 4 shows a generalized example describing how the components of the infoserver function, in accordance with the principles of the present invention work together.

Fig. 5 is a Unified Modeling Language (UML) class diagram showing major software elements of an exemplary infoserver system, in accordance with the principles of the present invention.

### DETAILED DESCRIPTION OF ILLUSTRATIVE EMBODIMENTS

The present invention provides a mechanism for retrieving, examining, formatting, and forwarding information content as a service to a user on an individual level. A primary function provided by the present invention is the individualized forwarding of information from one or more data sources to one (or

more) user defined destination(s). This routing of information can be performed at regular intervals, whenever the source data changes, or on demand, as defined by the individual user.

In accordance with the principles of the present invention,  
5 information can be retrieved from a variety of types of data sources, including Web Pages, databases, XML documents, and Email (IMAP) accounts, legacy relational databases, news, notes, vCalendar, and more.

Information can be directed to any of a plurality of types of destinations, e.g., to Email accounts, wireless devices via a short message  
10 services, databases, or other special handlers that analyze the received data and respond in appropriate ways.

In accordance with the principles of the present invention, a destination may forward the information (as received or as modified) to another destination(s) in accordance with, e.g., a set of rules (e.g., according to the time of  
15 day), based on content in the received information, etc.

In the disclosed embodiment, an individual user is given the ability to determine how the information is presented at the destination. Potential formats include a simple user-defined message ("Hey- new data at Fred's Home Page"), to text or html-based content for particular fields of the received data.

20 Preferably, the infoserver uses open standards for retrieving, processing, and forwarding data. Moreover, the infoserver preferably follows the principles of interface-driven software design, enabling a high degree of flexibility when integrating with other systems. Furthermore, the infoserver may use modern object-oriented paradigms for event-driven information management.

25 The present invention may be implemented in a stand-alone product or as a tool for developing other Information-based applications. As disclosed, the infoserver may utilize JDBC, XML, XSL, RMI, SMTP, and/or other protocols or technologies for retrieving, manipulating, presenting, and/or delivering information. The disclosed embodiments include an application program operating on a Java-enabled server platform.  
30

Because of its direct exposure to subscribers and to the Internet, it is preferred that the infoserver application program not reside on a service network platform. To integrate easily into different provider networks, it is preferred that the infoserver operate on any of the most common server platforms, including,  
35 e.g., Solaris (Intel/Sparc), NT, HP/UX, and/or Linux. Moreover, it is preferred that

the infoserver support an open communication architecture so that other applications can communicate with it more easily.

The infoserver provides a mechanism for converting various types of information, from various sources, into a consistent XML representation. The infoserver provides an object-oriented, event-driven notification system for alerting software components that Information should be accessed.

The infoserver preferably provides a mechanism for 'chaining' multiple DataEventListeners, thereby allowing information to be directed to a Filter Listener and then only redirected to other Listeners if certain criteria within the Data has been met. The infoserver preferably uses XSL technology to format XML data in ways appropriate for the destination.

The infoserver can be deployed as a stand-alone application which can be utilized by custom software components, as well as a commercial-off-the-shelf (COTS) web interface for consumer use.

Fig. 1 shows an exemplary infoserver **100** retrieving data from any or all of a plurality of different data sources **102-128** as a service provided to an individual user, e.g., mobile user **118**, in accordance with the principles of the present invention.

In particular, as shown in Fig. 1, an infoserver application **100** resides between an individual user and a desired one or more information sources **102-128**. While the infoserver **100** may be provided as a separate application on a separate network device from a wireless internet gateway **116** or other accessing device, it may also be provided on a common platform with another network device, particularly in less sensitive applications.

A wireless internet gateway **116** is provided between a wireless service provider which provides access to the mobile device **118**, and the information server **100**. The wireless internet gateway **116** provides a buffer between a service providers network equipment (e.g., a wireless provider's network), and the devices from which information may be accessed.

A suitable wireless internet gateway is shown and described in a co-owned U.S. Patent Application No. 09/630,762, filed August 2, 2000, entitled "Wireless Internet Gateway" by Rich Smith, the entirety of which is expressly incorporated herein by reference.

As shown in Fig. 1, in a basic implementation, the mobile device **118** requests a retrieval of information from a particular data source **102-128** using a mobile originated query.

The information server ("infoserver") communicates data from and/or  
5 to any of a plurality of data sources **102-128** based on individual requests or individual configurations established by a particular user (e.g., mobile device **118**). Possible data sources include, but are not limited to, a source database (e.g., a relational database) **102**, a web page **104**, an Email account **106**, a news source **108**, a calendar application such as vCalendar **110**, a LOTUS™ Notes application  
10 **112**, an XML document **114**, a web interface device **120**, an interactive voice response (IVR) application **122**, a destination database **124**, an SMTP server **126**, and/or a provisioning database **128**.

The different data sources **102-128** may communicate their data with the infoserver **100** using any appropriate protocol. For instance, the source  
15 database **102**, LOTUS™ Notes **112**, the destination database **124**, and/or the provisioning database **128** may use a JDBC protocol. The web pages **104** may communicate with the infoserver using the HTTP protocol, and XML documents may be retrieved/sent using the XML protocol. The Email account **106** may communicate with the infoserver **100** using an IMAP protocol. The News source  
20 **108** may communicate using an NNTP protocol. The calendar application **110** may communicate using a VCAL protocol. The web interface device **120** may communicate using an RMI protocol, and the SMTP server **126** may communicate using an SMTP protocol.

Custom protocols are also possible, as depicted by the IVR  
25 application **122**, which communicates with the infoserver **100** using a custom protocol.

Thus, data sources **202** may access information from, e.g., standard databases such as an ORACLE™ database, an INFORMIX™ database, and/or from an SQL server through JDBC. A data source **202** may also or alternatively  
30 process HTML web pages, thereby allowing a web page's core data to be expressed as XML. A data sources **202** may also query from one or more Email account(s) using, e.g., the IMAP protocol. A data source may also retrieve XML documents, or query one or more news server(s) via, e.g., the NNTP protocol. Other possible data sources **202** include a VCalendar database, a LOTUS™  
35 Notes database, or an SNMP MIB.

Fig. 2 illustrates core functionality of an infoserver **100**, in accordance with the principles of the present invention.

In particular, as shown in Fig. 2, an infoserver **100** comprises three basic component types: one or more data source(s) **202**, which provide access to  
5 information and from which information is retrieved; one or more data workers **200**, which act autonomously to access data according to the user's directives, and one or more information destination(s) **204a-204c**, to which information is routed.

Data sources **202** provide a mechanism for accessing disparate  
10 types of data. Regardless of where the data originates, data sources **202** convert their data to XML streams that can then be accessed by data destinations **204a-204c**. The data is preferably accessed in a streaming fashion so that large quantities of data can be processed. A data stream (or streaming data) refers to information that is received and read one byte at a time, as opposed to the entire  
15 data all at once. By allowing the data to be retrieved as a byte stream, the data source **202** may be configured so that the entire data content need not be retained in memory at any single time. This is important for the implementation of very large data sets from data sources **202**.

The data sources **202** can optionally provide any number of  
20 stylesheets for their data. These stylesheets may be defined in the eXtensible Stylesheet Language (XSL). The stylesheets define presentation specifications for the data. This allows the data source **202** to provide suggested display templates for its information. For example, a data source **202** providing stock information could provide stylesheets that define different presentation layouts for  
25 viewing the information via a pager, a web browser, or an Email client.

Data workers **200** act on behalf of the user to access one or more data sources **202** at pre-defined intervals, or as specially requested by the user. The data worker **200** fires data events to data destinations at appropriate times. The data event contains a reference to the data source that should be queried by  
30 the destination. The destination retrieves information from the data source **202**. A data worker **200** can fire data events at predefined minutes, hours, days of the week, or days of the month. Data workers **200** can also be temporarily 'turned off' by a user if its services are not required for a time.

Data workers **200** have the ability to initiate queries on demand,  
35 regardless of the scheduled time. This allows end-users to directly request an



immediate transmission of some piece of data. Such a request can be issued by 2-way pagers, handsets, or Palm devices, thereby allowing the user to obtain information on demand.

Data destinations **204a-204c** are responsible for receiving the information and delivering it to a destination, such as a pager or Email account. A data destination **204a-204c** queries the XML data stream from a data source **202** and optionally formats the data into a presentable format. For example, a destination for a WAP-enabled phone would format the XML data into a document using the Wireless Markup Language (WML), whereas an Email destination might format the data as formatted text or HTML.

In accordance with an important aspect of the present invention, data sources **202** are abstracted, or separated, from data destination components **204a-204c**. By abstracting the data source **202** and data destination components **204a-204c** into entities that communicate via XML, the info server can readily accommodate different types of information sources. Moreover, by implementing XSL, the various information source types can be presented in a variety of formats to accommodate many types of destination devices.

Fig. 3 is a more detailed view of an exemplary software architecture with communications shown between software modules, in accordance with the principles of the present invention.

In particular, as shown in Fig. 3, the disclosed information server **100** application program includes a dataworker module **300** and a useragent module **302** within the dataworker **200** shown in Fig. 2. The dataworker module **300** and the useragent module **302** provide the information 'engine' for the information server **100**.

An *IdataSource* module **202** provides communications with the desired data source. There may be more than one *IdataSource* module **202** in a particular information server. Each *IdataSource* module **202** may be developed to handle a particular protocol. For instance, A first *IdataSource* module **202** may be implemented to communicate with JDBC protocols to database sources, while another *IdataSource* module **202** may be implemented to communicate with IMAP protocols to Email accounts, etc.

The module of the information server **100** which communicates with the info destination **204** (e.g., the mobile user) is comprised of a UserDeliveryDestination module **304** and a DataFormatter module **306**.

There are two ways to support the many processes that the system must provide: centrally or de-centrally.

In a centrally managed process, a single process would attend to the unique requirements established by each user. For example, every minute it might check a database to determine if any data should be queried and forwarded for any users. For each data request that has been 'queued up', the central process would have to keep track of user-specific settings such as whether the service had been disabled, when the service should expire, and under what conditions data should be forwarded. This will become even more complicated as additional options are made available to the end-user.

Because the services offered by the infoserver **100** may be so tailored to individual users, a centralized processing approach is not recommended. A better approach is to make the software architecture simulate its environment. Specifically, the infoserver **100** implements a decentralized approach in which the individual users are represented as 'living', autonomous objects that can take care of their own affairs. There is preferably no monolithic central thread that tries to address the unique needs of each user. Rather, individual user objects run in their own threads (processes) and query data, as well as perform other tasks in the future, according to the rules specified by their individual users.

These user objects, or user agents **302** as shown in Fig. 3, are autonomous in nature. Namely, they not only operate in their own thread independently of other processes, but they can be saved and retrieved from disk and can be moved onto other host servers as required. So, if too many user objects are running on one server, user agents **302** can automatically (or manually) move onto other servers for automatic load balancing.

Taking this decentralized approach even further, there is no need for each user agent **302** to centrally monitor and control all of the services that are being performed. Rather, each individual service can be performed by its own threaded object which handles only those tasks that are assigned to it. Therefore, it is very easy to start, stop, or assign the life span of particular services. All the user need do is directly address the worker object performing the service and ask it to start, stop, or modify its life span. Preferably no other data workers **200** are affected by this transaction, and no other user agents **302** will even know that the change has occurred.

Accordingly, the two major components of the infoserver **100** are the user agents **302**, which aggregate services for individual end-users, and data workers **300**, which actually perform a given service for a User Agent **302**.

Fig. 4 shows a generalized example describing how the components  
5 of the infoserver **100** function, in accordance with the principles of the present invention work together.

In particular, as shown in Fig. 4, a particular user agent **302a** for Joe performs tasks that are uniquely created for that end user. In this example, Joe's user agent **302a** has an interest in tracking the weather. Joe's user agent **302a** is  
10 therefore configured with objects that will help manage this requirement.

For instance, as shown in Fig. 4, a commonly shared weather data source **404** queries a local weather database/feed source **402** using any appropriate protocol for local weather. The weather data source **404** may parse the information, e.g., into 'high temperature', 'low temperature', 'description', and  
15 'weather warning' elements and place the parsed information in a desired format in an XML document.

Joe's user agent **302** includes a data worker **300** that monitors the weather data source **404**, e.g., every 4 hours, whenever the data changes, on demand, etc. Whenever the weather data worker **406** obtains data from the  
20 weather data source **404**, it forwards it to a destination (e.g., SMS destination **410** or Email destination **412**) chosen by the individual user/owner of the agent **302a**. The destination **410**, **412** evaluates the data and presents it in the appropriate manner to the user.

Two types of destinations may be made available within the  
25 InfoServer **100**: simple destinations and filters. Examples of simple destinations include E-mail and short messaging systems (SMS). SMS messages are submitted through the wireless Internet gateway **116** (Fig. 1). When information is routed to a simple destination, it is preferably formatted and sent via the appropriate protocol to the destination.

In a more sophisticated and intelligent embodiment, the data (e.g.,  
30 the weather data) may be first transmitted to a filter destination, where further evaluation and disposition is determined. Filters are more sophisticated destinations that actually process the information in some way and then forward it to a different destination. For instance, one type filter may be implemented which  
35 forwards information to a particular destination only if any pertinent information

has changed since the last query. Another type filter may be implemented which forwards information to a particular destination only if a key condition within the information is met.

Thus, a filter destination **408** may be implemented in Joe's agent  
5 **302a** to provide an intermediary analysis and to determine a final destination for the data. For instance, in the given example of Fig. 4, the filter destination **408** may evaluate the weather data XML page received from the weather data worker **406** for the presence of a 'Warning' indicator within the data it receives. If a warning exists, then the user-defined 'Weather Warning!' message may be send  
10 to the individual using a more immediate device (e.g., to their wireless handset via the SMS destination **410**). On the other hand, if a warning is not associated with the received information, then, e.g., the full weather information may be sent via E-mail by transmission of the XML data page to the Email destination **412**.

Fig. 5 is a Unified Modeling Language (UML) class diagram showing  
15 major software elements of an exemplary infoserver system, in accordance with the principles of the present invention. In Fig. 5, lines with closed arrows indicate inheritance, or a 'specialization' relationship to the class at which the arrow is being directed. Dashed lines with closed arrows indicate that a class is implementing the interface to which the arrow points. Lines with open arrows  
20 indicate an association, in which a class contains an instance member of the type of class to which the arrow is directed.

The exemplary infoserver operates primarily through the use of Java Interfaces, which are roughly equivalent to abstract classes in C++.

As shown in Fig. 5, a data source **202** includes a 'IDataSource'  
25 interface **504**, an 'IDataEventSource' interface **502**, and an 'IdtaEventListener' interface **514**.

The data worker **200** includes a 'DataWorker' module **500**, as well as an information analysis engine entitled 'QueryEngine' **510**. The QueryEngine **510** may use any appropriate protocol interface to query a data source at the  
30 appropriate time. For instance, the 'QueryEngine' **510** may use a 'JDBCQueryEngine' module **602** to query databases using JDBC protocols, a 'WebQueryEngine' module **608** to query a web page using, e.g., HTML protocols, a 'PageParserQueryEngine' module **604** to parse information from an XML data stream, or a 'NewEmailQueryEngine' module **606** to query Email accounts.

A filter **408** may be implemented including an appropriate 'DataFilter' module **610**, a 'SearchFilter' module **612** which searches for particular information in a received data stream (e.g., in an XML data stream), or a 'ChangeOnlyFilter' module **614** which determines if a change in a data stream has occurred since a  
5 last query. Thus, the 'ChangeOnlyFilter' destination **614** may be implemented to forward the information to another destination if pertinent information has changed since the last query, and the 'SearchFilter' destination **612** may be implemented to forward the information to another destination if a certain condition within the XML stream is met.

10 A data destination **304** component of the infoserver **100** includes a 'UserDeliveryDestination' module **516**, with appropriate interface modules. Example destination interface modules include a 'DataBaseDestination' module **620**, a 'ChatUserDestination' module **622**, an 'EmailUserDestination' module **624**, and an 'SMSUserDestination' module **626**.

15 A 'DataFormatter' module **518** may format source information into, e.g., XSL or text, using an appropriate 'DataSourceXSLDataFormatter' module **520** or 'DataSourceTextDataFormatter' module **522**.

The 'DataWorker' module **500** fires off 'DataEvents' **508** to the data destinations **304** when appropriate. Appropriate times can explicitly assigned by  
20 the individual user, rather than by the network administrator on a class basis. The 'DataWorker' module **500** may be instructed to activate at any given time or sets of times during the month, down to the minute. The 'DataWorker' **500** can also activate when specifically instructed, thereby providing information on demand.

Three important interfaces in the design of the exemplary infoserver  
25 **100** include the 'IDataSource' module **504**, the 'IDataEventListener' module **514**, and the 'IDataEventSource' module **502**.

The 'IDataSource' module **504** provides XML-based information to the infoserver engines. The 'IDataEventListener' module **514** receives  
30 'DataEvents' **508** indicating that the infoserver **100** should query an IDataSource **504**. The 'IDataEventSource' module **502** is responsible for sending the 'DataEvents' **508** to the 'IDataEventListeners' **514**.

Objects that implement these interfaces perform the work within the infoserver environment. For instance, the QueryEngine class **510** implements IDataSource **504** and acts as a base class for the Web, XML, Email, and  
35 Database QueryEngines **510**, **602**, **604**, **606**, **608** that have been produced.

The DataWorker class **500**, which is a special type of Worker, implements the IDataEventSource Interface **502**, as it is responsible for telling IDataEventListeners **514** when they should query from a particular IDataSource **504**. When the DataWorker **500** does its work, it fires a DataEvent **508** to the  
5    IDataEventListener **514**. The DataEvent **508** contains a reference to the IDataSource **504** which is to be queried by the IDataEventListener **514**.

There are many possible types of IDataEventListeners **514** within the infoServer **100**. For instance, a simple one is the UserDeliveryDestination **516**, which is a base class for Destinations representing SMS, Email, Database  
10    transactions, etc. When a UserDeliveryDestination **516** receives a DataEvent **508**, it will query the IDataSource **504** identified by the DataEvent **508** for the XML content.

The UserDeliveryDestination **516** then uses a DataFormatter **518** to format the content in an appropriate manner. For example, the data may be  
15    formatted according to an XSL template using, e.g., a DataSourceXSLDataFormatter **520**, or it may simply convert the XML data in a text-based tree structure using, e.g., a DataSourceTextDataFormatter **522**. Subclasses of the DataFormatter **518** are preferably able to format the XML data in different ways.

As shown in Fig. 5, four UserDeliveryDestination classes are  
20    presented. In particular, a DatabaseDestination class **620** allows delivery of content to a database destination. A ChatUserDestination class **622** allows delivery of chat postings to an IRC Chat Group. An EmailUserDestination class **624** allows delivery of email messages, and an SMSUserDestination class **626**  
25    allows delivery of short messages to a short messaging system.

The DataFilter class **610** is also shown. The DataFilter class **610** is an IDataEventListener **514** that acts as a base class for filtering rules. The DataFilter **610** is not only a DataEventListener **514**, but also an IDataSource **504** and an IDataEventSource **502**.  
30

When the DataFilter **610** receives information, it is able to selectively direct that information to other destinations. For example, the ChangeOnlyFilter subclass **614** will redirect information only if the information has changed since the last time it was received. The SearchFilter subclass **612** will forward information only if certain search criteria have been met.

Fig. 5 also shows more types of QueryEngines **510**. A QueryEngine is able to query, e.g., databases (via JDBC) using a JDBCQueryEngine module **602**, web pages using a WebQueryEngine module **608**, and/or Email accounts using a NewEmailQueryEngine module **606**.

5           A Web-based interface may be provided for the infoserver **100** to allows the technology to be used as a turnKey mobile information service. The infoserver **100** can also be used in any number of applications that require automated manipulation of data.

Each agent may be described, e.g., by the user's name, Email  
10   address, Mobile Number, etc. Each agent can have any number of DataWorkers **500**. Each DataWorker **500** has an associated IdataSource **504**, as well as any number of destinations. It is possible to assign multiple IDataSources **504** to a particular DataWorker **500**, but in practice this can add undesirable complexity to the system.

15           When appropriate, the DataWorker **500** creates a DataEvent object **508** and fires it to the destination(s) by calling the 'processData' method of the UserDeliveryDestination **516**. The DataEvent **508** contains a reference to the IDataSource **504** that should be queried by the UserDeliveryDestination **516**. The UserDeliveryDestination **516** then queries the IdataSource **504** by calling the  
20   getXMLStream() method of the IdataSource **504**. Once it has the information, the UserDeliveryDestination **516** can deliver it appropriately.

The following provides an illustration of how the QueryNet libraries can be used.

It is not necessary for components within the infoserver to reside on  
25   the same server. With the ability to disperse components among two or more servers, the infoserver product scales well and greatly expands product deployment possibilities. For example, a 'personal infoserver' can be implemented as a stand-alone application that allows a subscriber to create and run data workers locally. Local data workers query a master infoserver for  
30   available data sources, and forwards the information to either local data destinations (e.g., a user's hard drive), or public data destinations such as a short messaging system (SMS). Such a distributed implementation allows information applications based on infoserver technology to interoperate over a geographically disperse environment.

Although the present invention has particular relevance to wireless distribution of information content, it is also applicable to multiple electronic distribution mechanisms.

5 While the invention has been described with reference to the exemplary embodiments thereof, those skilled in the art will be able to make various modifications to the described embodiments of the invention without departing from the true spirit and scope of the invention.



**CLAIMS**

What is claimed is:

1. An individualized network information delivery system,  
5 comprising:  
a data source interface module;  
a data worker module; and  
a data event destination module;  
said individualized network information delivery system having an  
10 event-driven architecture; and  
said data worker being abstract from said data source interface  
module.
2. The individualized network information delivery system according  
15 to claim 1, wherein:  
said data event destination module interface with a short messaging  
system.
3. The individualized network information delivery system according  
20 to claim 1, wherein:  
said data worker is abstracted from said data event destination  
module.
4. The individualized network information delivery system according  
25 to claim 1, wherein:  
said data worker includes a query engine.
5. The individualized network information delivery system according  
to claim 4, wherein:  
30 said query engine is adapted to query a web page for content.
6. The individualized network information delivery system according  
to claim 4, wherein:  
said query engine is adapted to query a database for content.

35

7. The individualized network information delivery system according to claim 6, wherein:

said query utilizes a JDBC protocol.

5 8. The individualized network information delivery system according to claim 4, wherein:

said query engine is adapted to query an email account.

9. The individualized network information delivery system according to claim 4, wherein:

10 said query engine to parse said content into a format more convenient for said data worker.

10. The individualized network information delivery system according to claim 1, further comprising:

a formatter module to format said content into XSL information.

11. The individualized network information delivery system according to claim 1, wherein:

20 said data event destination module provides XML information to a destination device.

12. The individualized network information delivery system according to claim 1, wherein said data source interface module comprises:

25 a protocol converter to convert a protocol of said source data into an XML data stream.

13. The individualized network information delivery system according to claim 12, wherein:

30 said XML data stream is read by said data event destination module one byte at a time.

14. The individualized network information delivery system according to claim 1, wherein:

data from a data source communicating with said data source interface module is HTML format data.

5

15. The individualized network information delivery system according to claim 1, wherein:

data from a data source communicating with said data source interface module is email, said data source interface module utilizing an IMAP protocol to query an Email account as a source.

10

16. The individualized network information delivery system according to claim 1, wherein:

data from a data source communicating with said data source interface module is an XML format document.

15

17. The individualized network information delivery system according to claim 1, wherein:

a data source communicating with said data source interface module is a news server, data from said data source being communicated to said data source interface module utilizing an NNTP protocol to query said news server.

20

18. The individualized network information delivery system according to claim 1, wherein:

a data source communicating with said data source interface module is a Vcalendar database.

25

19. The individualized network information delivery system according to claim 1, wherein:

a data source communicating with said data source interface module is a Lotus database.

30

20. The individualized network information delivery system according to claim 1, wherein:

a data source communicating with said data source interface module is an SNMP MIB.

5

21. The individualized network information delivery system according to claim 1, wherein:

said data source interface module presents a data source with a stylesheet defined in an extensible Stylesheet Language (XSL).

10

22. An individualized network information delivery system, comprising:

a data worker module dedicated to an individual user; and

a data destination interface module;

15

said data worker module being adapted to generate an event listener to monitor source data at the behest of said individual user; and

said data worker being abstract from said data destination interface module.

20

23. The individualized network information delivery system according to claim 22, further comprising:

a data destination filter functionally between said data worker module and said data destination interface module, said data destination filter determining a characteristic of content from a particular data source, and  
25 redirecting said content from said particular data source to said individual user only if certain criteria within said content has been met.

24. The individualized network information delivery system according to claim 22, wherein:

30

said characteristic of said content is a change in said content.

25. The individualized network information delivery system according to claim 22, wherein:

said characteristic of said content is a change in a particular  
35 parameter of said content.

26. A method of monitoring an information source for an individual user of a network, comprising:

generating an event listener abstract from a requesting destination device of said individual user, said event listener monitoring a particular data source for an occurrence of a particular event; and

upon an occurrence of said particular event, directing content obtained from said data source to said requesting destination device.

27. The method of monitoring an information source for an individual user of a network according to claim 26, wherein:

said network is a wireless network.

28. The method of monitoring an information source for an individual user of a network according to claim 26, wherein:

said particular event is a change in content from said data source.

29. The method of monitoring an information source for an individual user of a network according to claim 26, wherein:

said particular event is a presence of a particular parameter in said content from said data source.

30. A method of monitoring an information source for an individual user of a network, comprising:

generating an event listener abstract from a requesting destination device of said individual user, said event listener monitoring a particular data source; and

automatically periodically directing content obtained from said data source to said requesting destination device.

31. Apparatus for monitoring an information source for an individual user of a network, comprising:

means for generating an event listener abstract from a requesting destination device of said individual user, said means for generating said event listener monitoring a particular data source for an occurrence of a particular event;  
5 and

means for directing content obtained from said data source to said requesting destination device upon an occurrence of said particular event.

10 32. The apparatus for monitoring an information source for an individual user of a network according to claim 31, wherein:  
said network is a wireless network.

33. The apparatus for monitoring an information source for an  
15 individual user of a network according to claim 31, wherein:  
said particular event is a change in content from said data source.

34. The apparatus for monitoring an information source for an individual user of a network according to claim 31, wherein:  
20 said particular event is a presence of a particular parameter in said content from said data source.

35. Apparatus for monitoring an information source for an individual user of a network, comprising:

25 means for generating an event listener abstract from a requesting destination device of said individual user, said means for generating said event listener monitoring a particular data source; and

means for automatically and periodically directing content obtained from said data source to said requesting destination device.

30

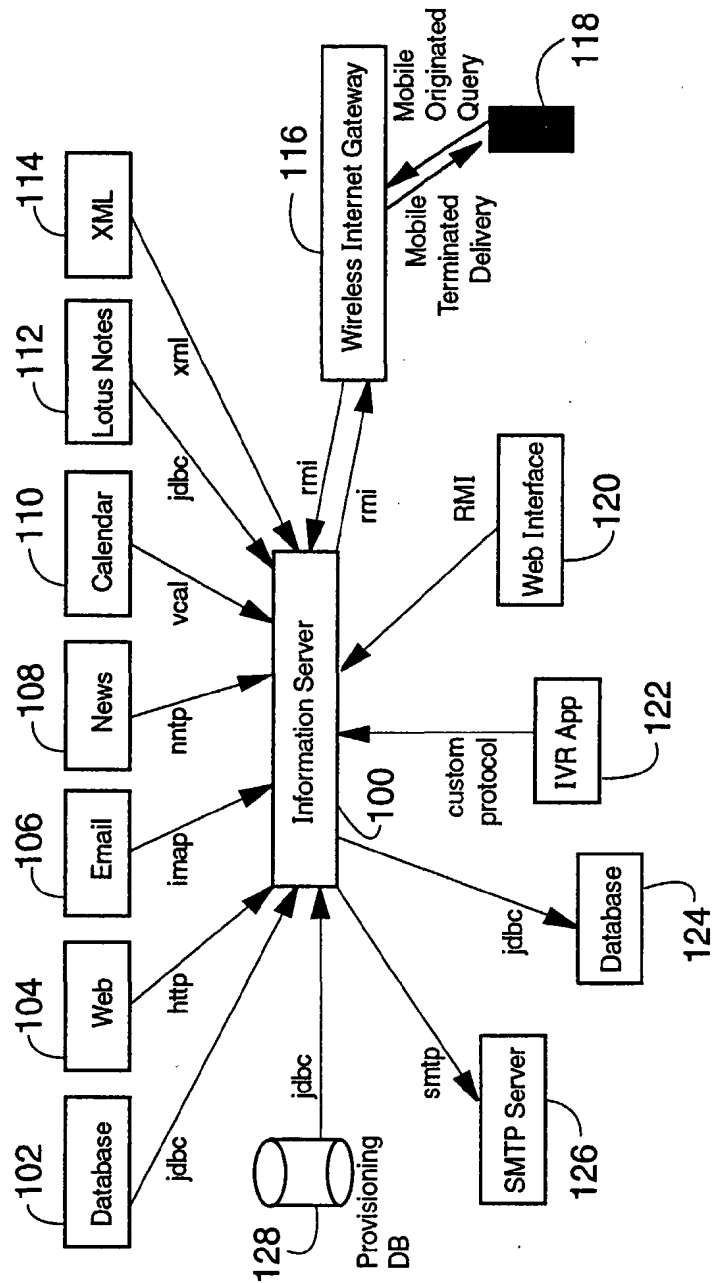


FIG. 1

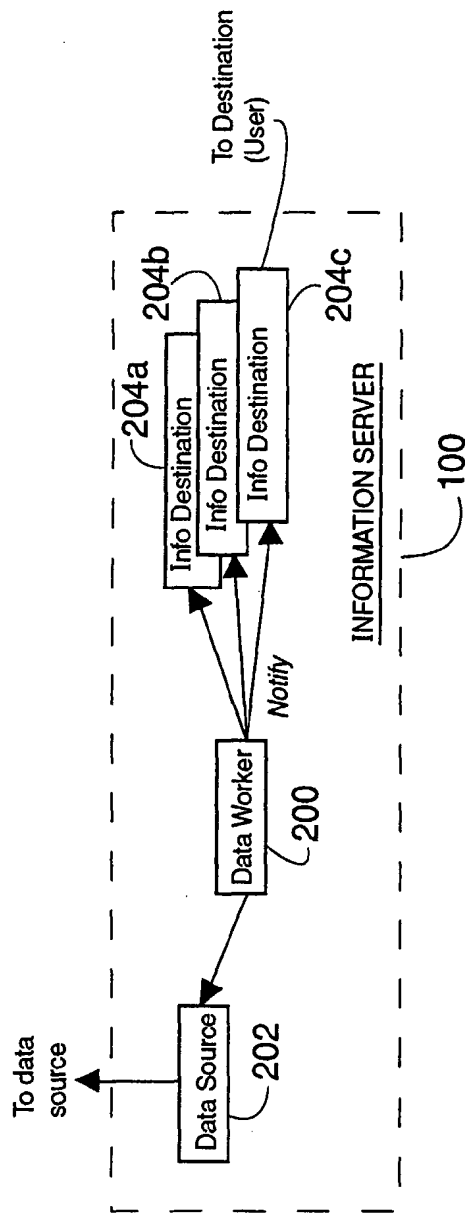


FIG. 2



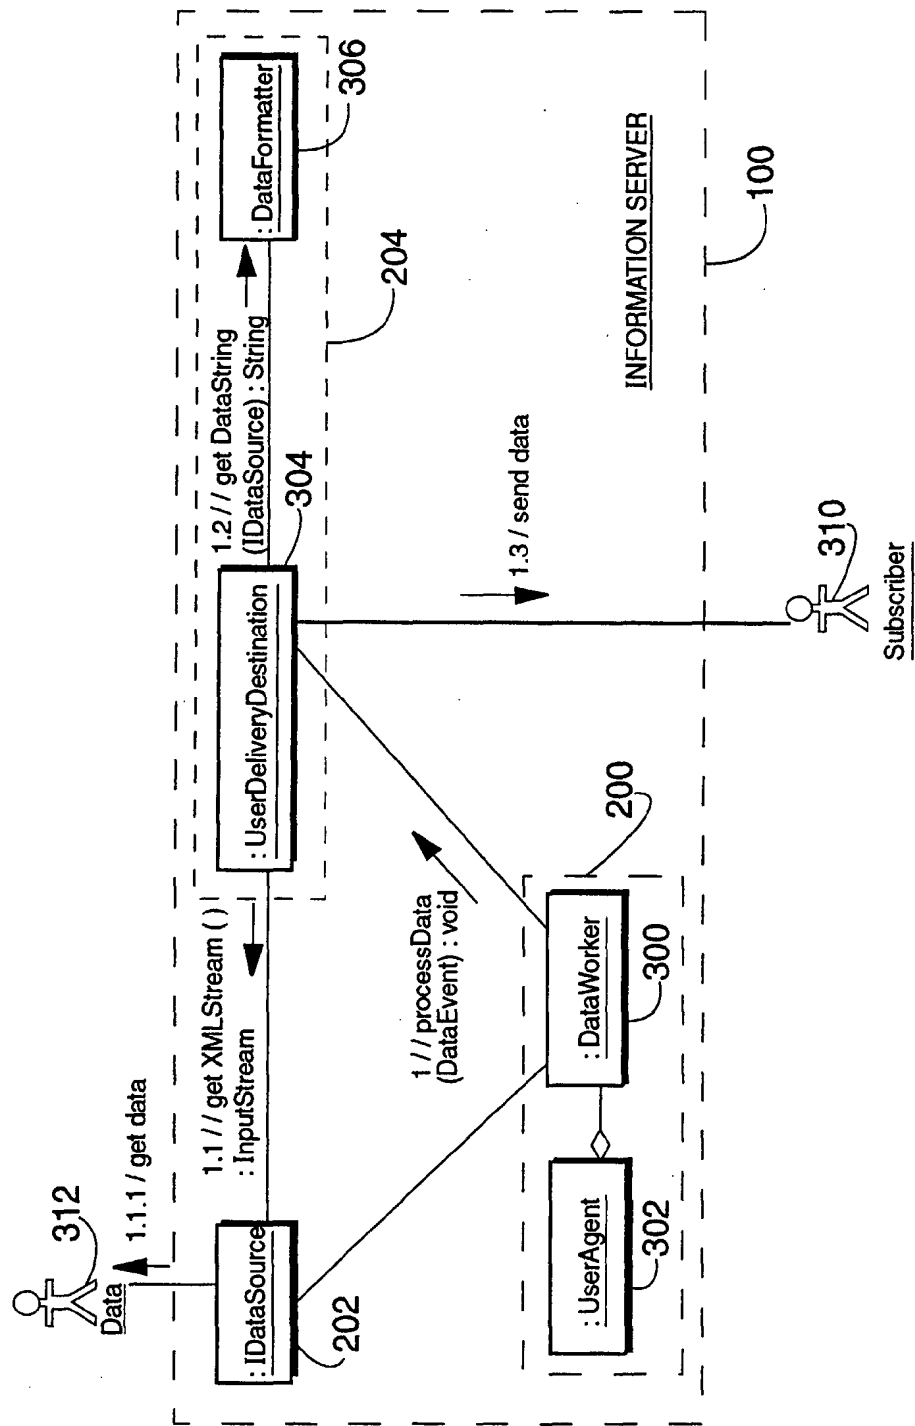


FIG. 3

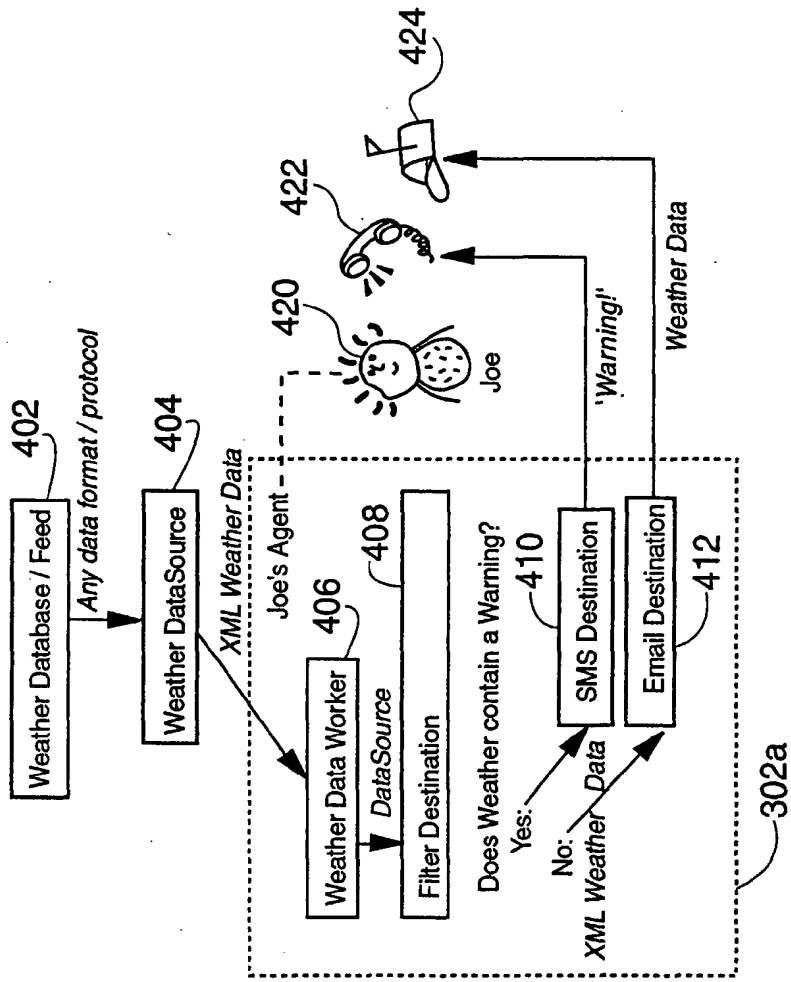


FIG. 4

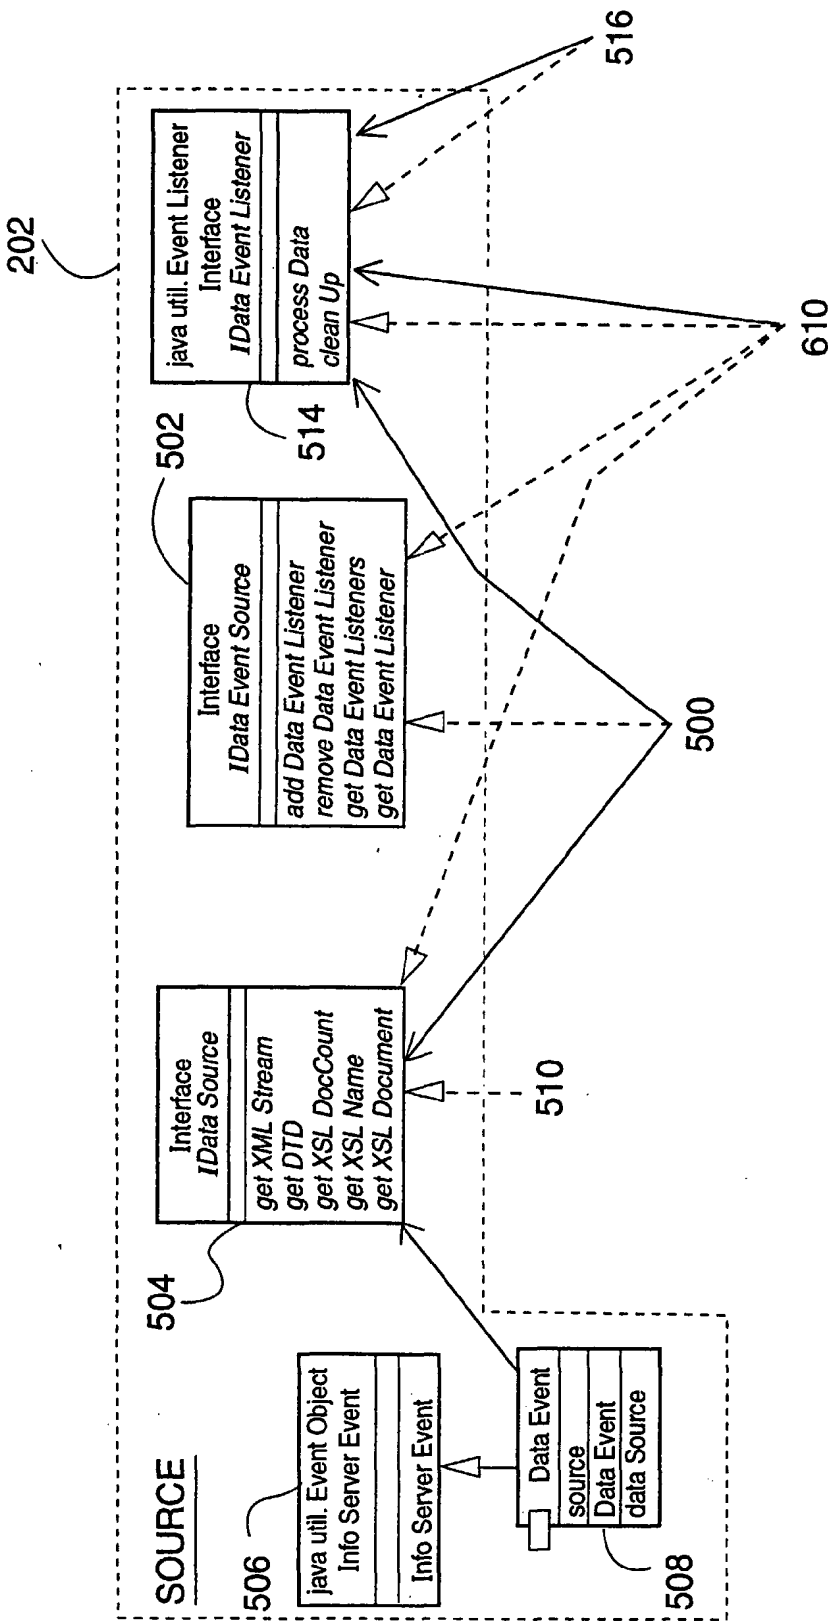
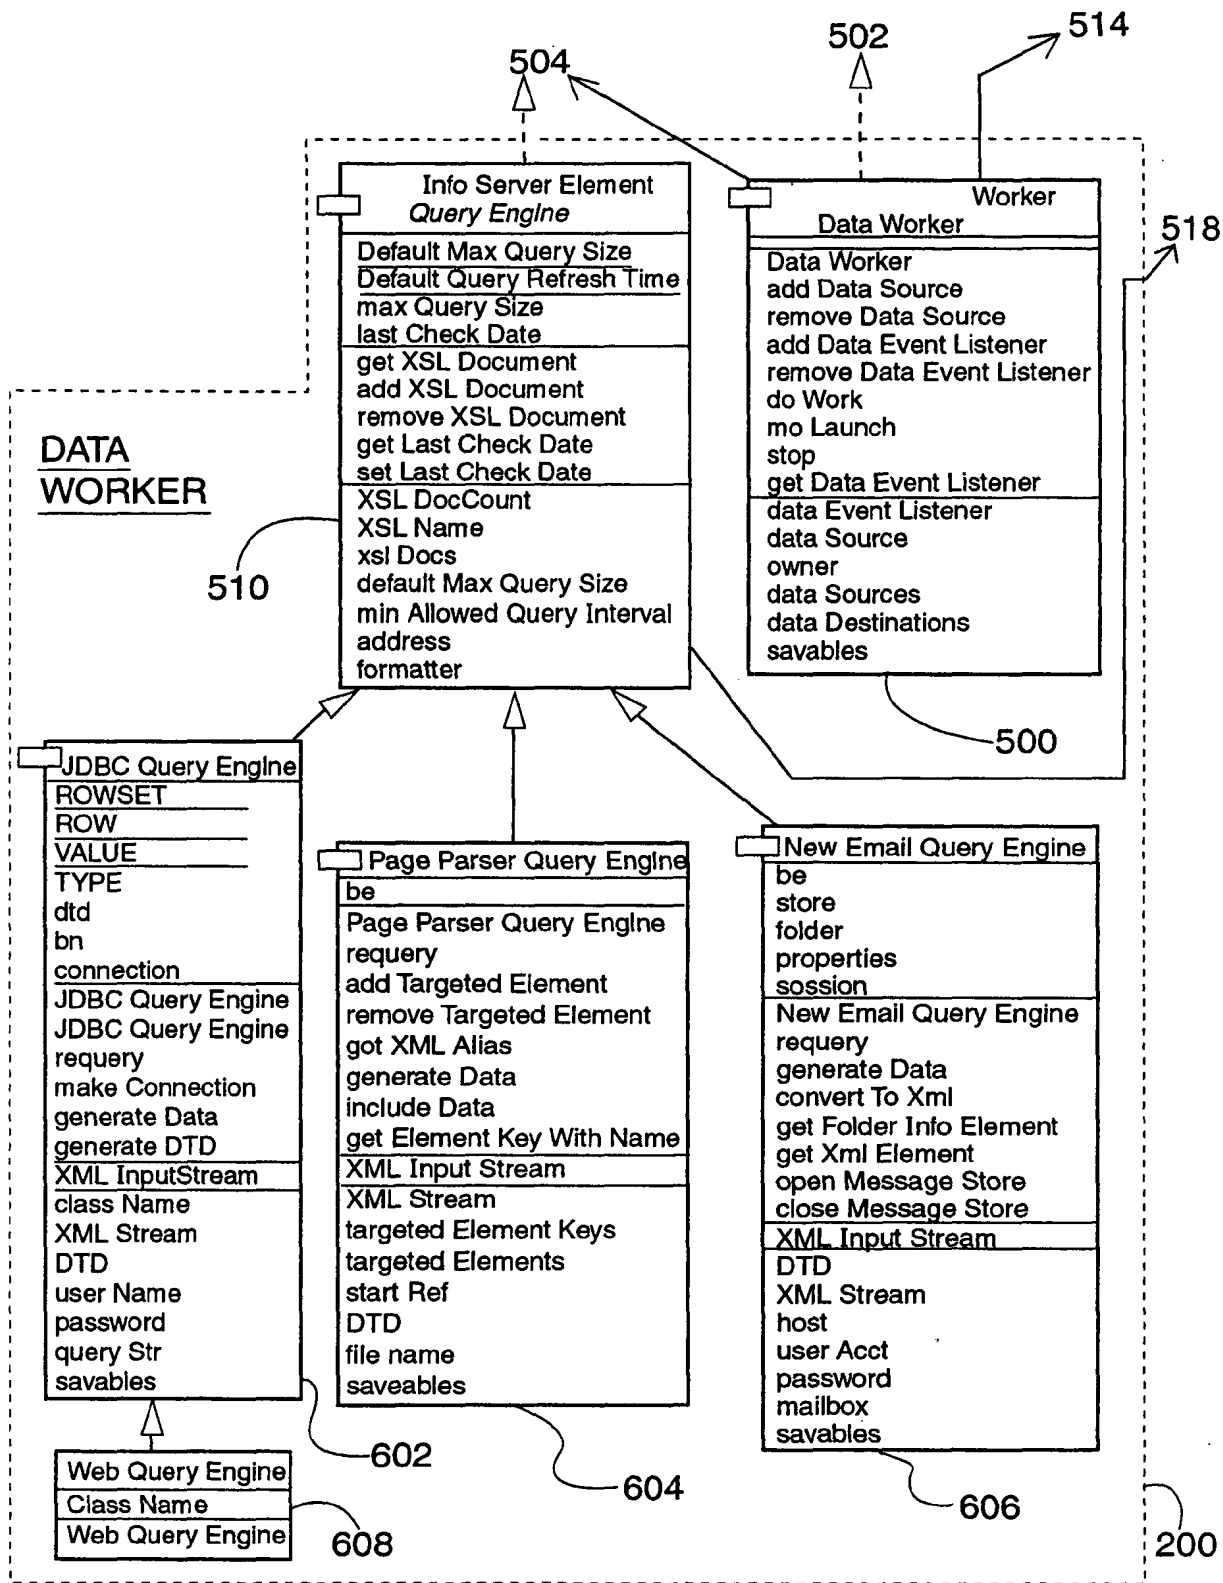


FIG. 5a



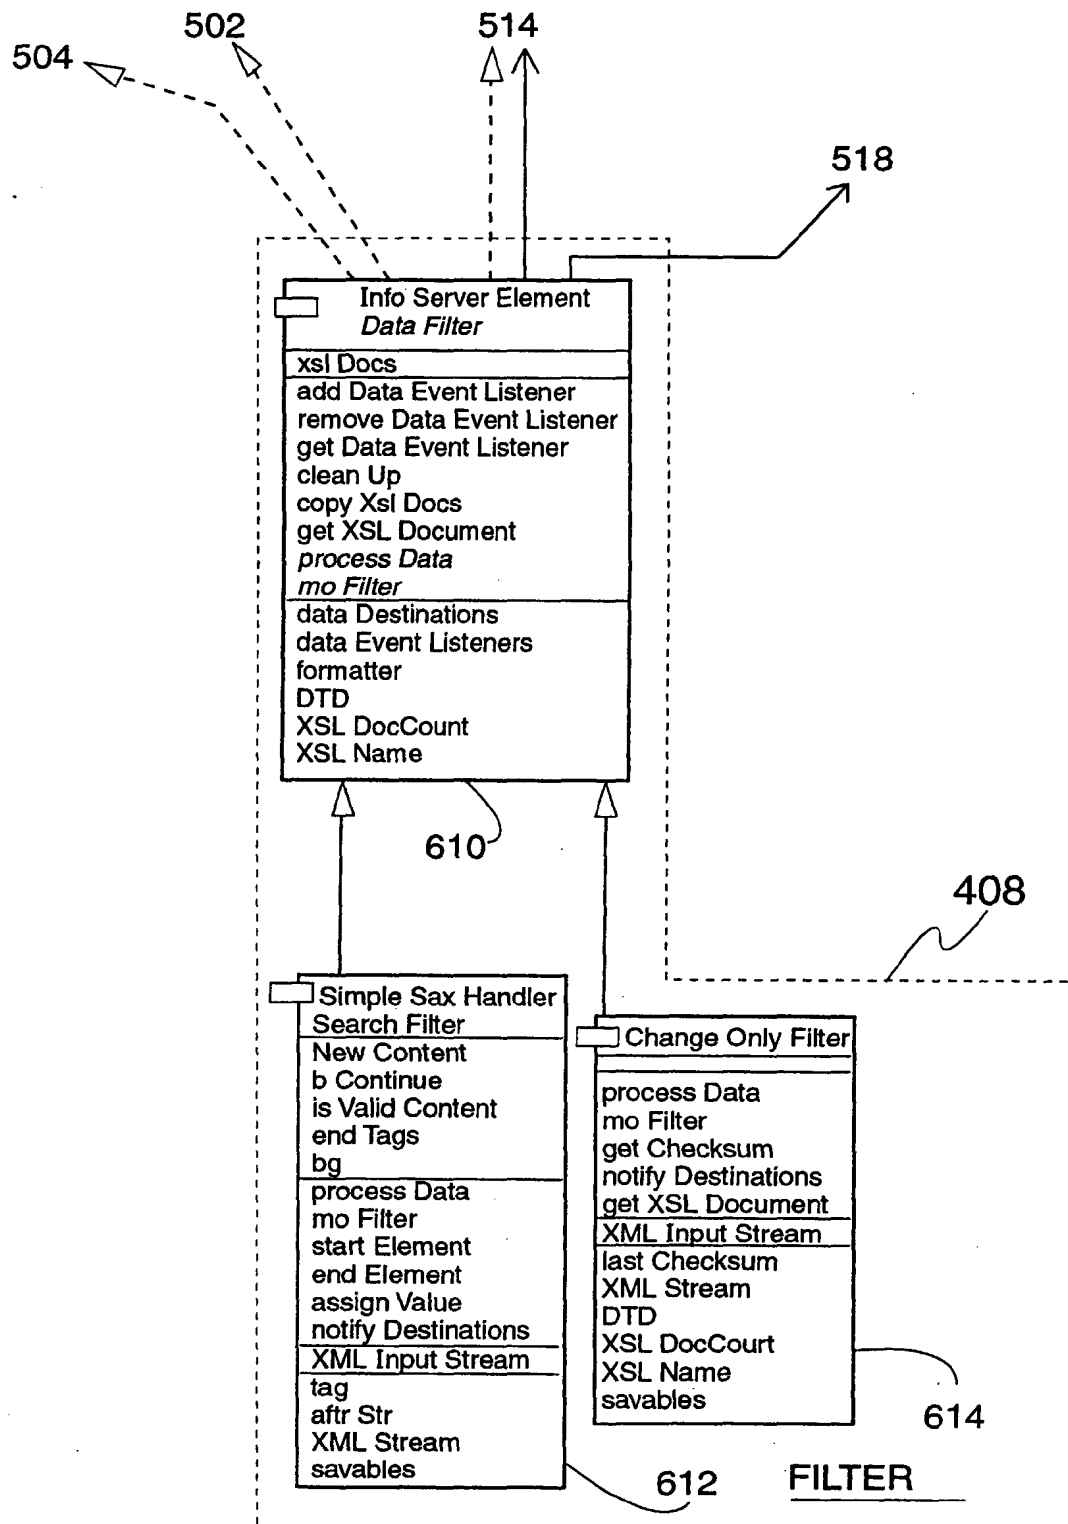


FIG. 5c

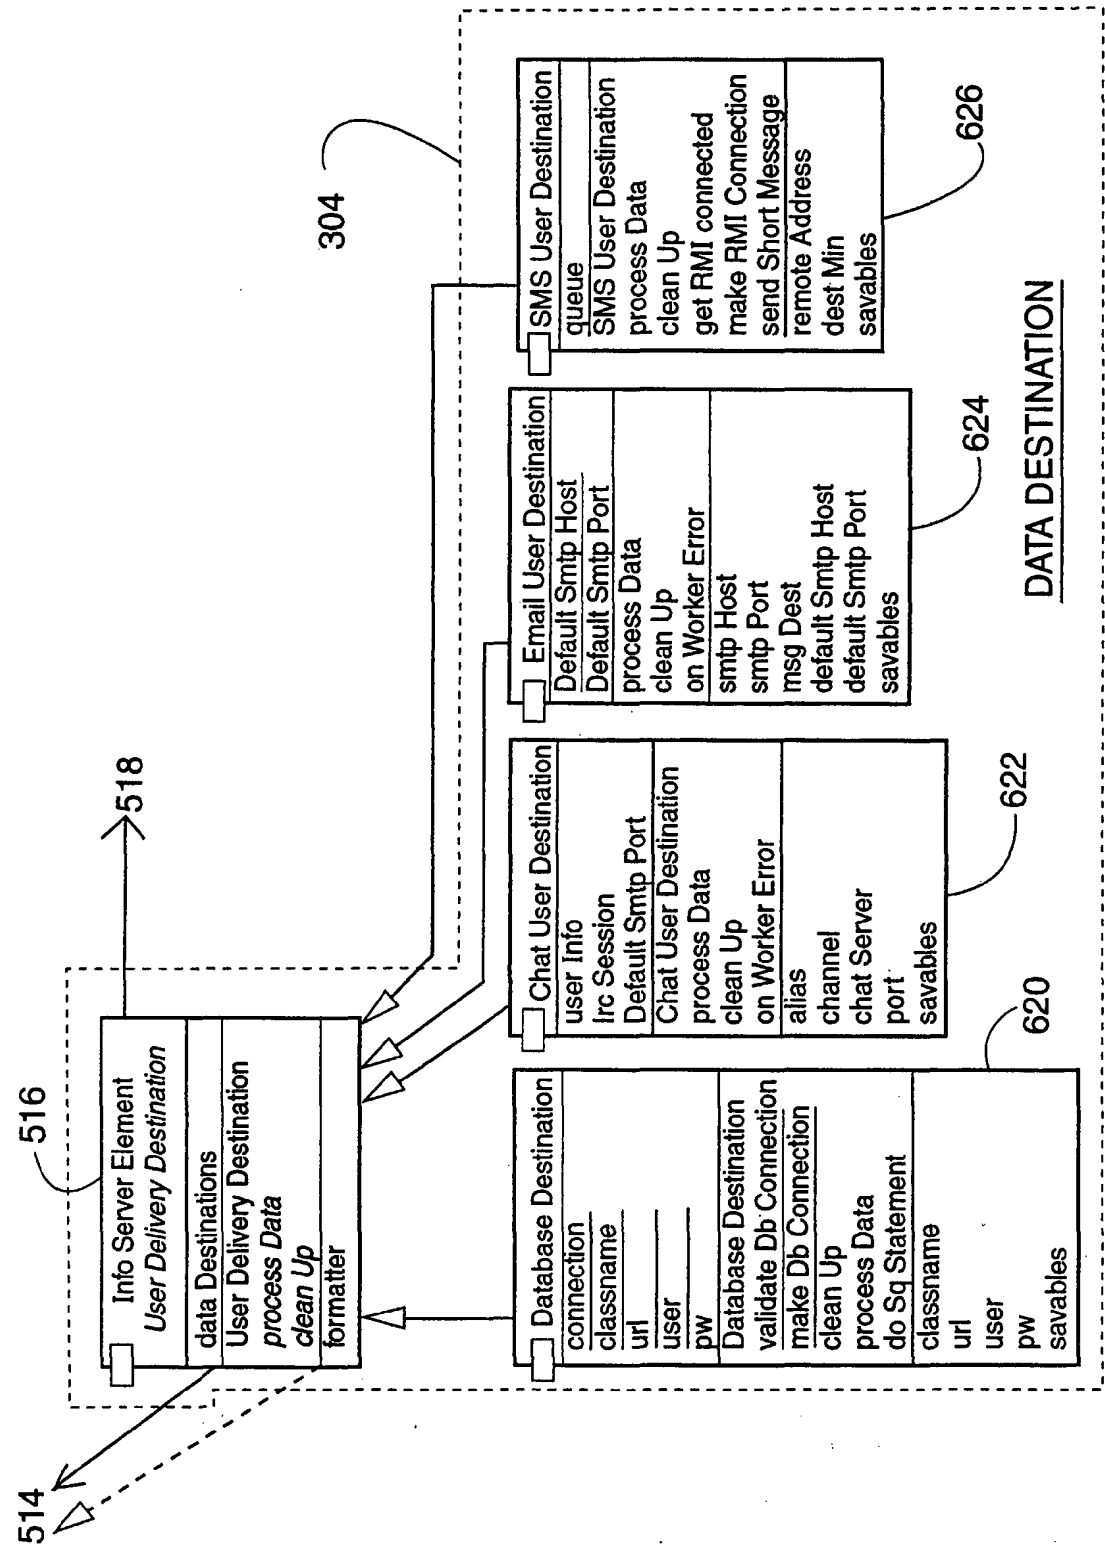


FIG. 5d

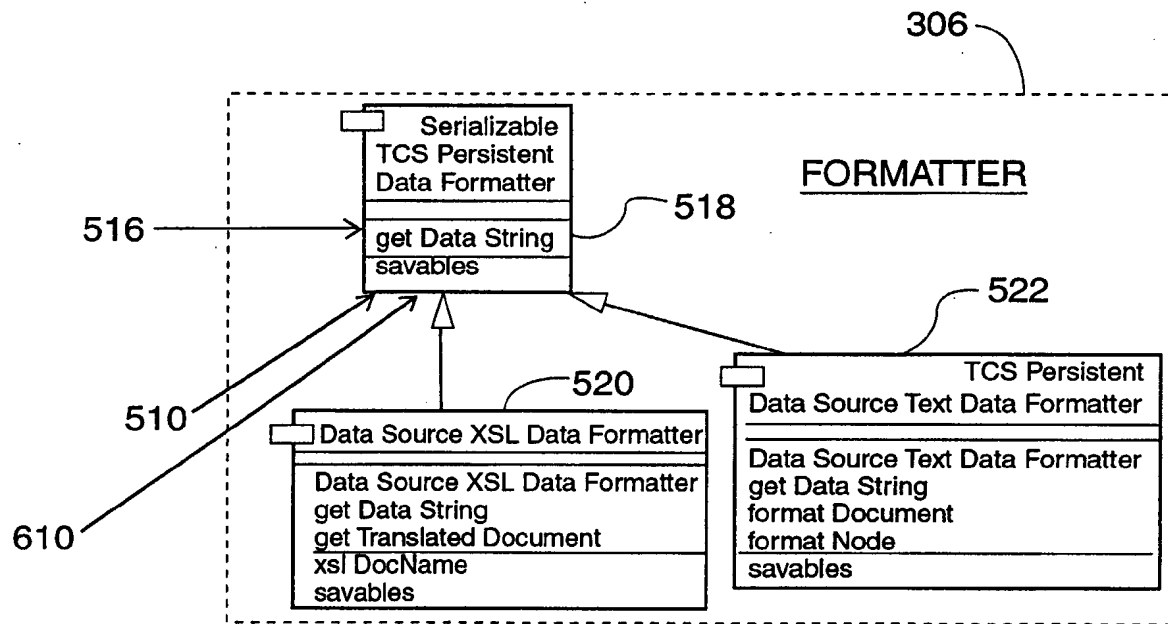


FIG. 5e

## INTERNATIONAL SEARCH REPORT

international application No.  
PCT/US01/11635

**A. CLASSIFICATION OF SUBJECT MATTER**

IPC(7) : G06F 12/30, 13/00, 15/173

US CL : 348/7; 370/252; 379/115; 707/2, 5, 10; 709/216, 217, 224

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 348/7; 370/252; 379/115; 707/2, 5, 10; 709/216, 217, 224

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 6,021,432 A (SIZER, II ET AL.) 01 APRIL 2000, COL. 1-6.	1-35
Y, P	US 6,195,697 B1 (BOWMAN-AMUAH) 27 FEBRUARY 2001, COL. 1-59.	1-35
Y, P	US 6,195,651 B1 (HANDEL ET AL.) 27 FEBRUARY 2001, COL. 1-40.	1-35



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be of particular relevance	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"E" earlier document published on or after the international filing date	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"&" document member of the same patent family
"O" document referring to an oral disclosure, use, exhibition or other means	
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

27 JUNE 2001

Date of mailing of the international search report

02 AUG 2001

Name and mailing address of the ISA/US  
Commissioner of Patents and Trademarks  
Box PCT  
Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

GLEN BURGESS

James R. Matthews

Telephone No. (703) 305-4792